


| SPECIFICATIONS | |
|---------------------------------|---------------|
| CONTANCT CARRIER MATERIAL/COLOR | TPU/YELLOW |
| MOLDED HEAD MATERIAL/COLOR | TPU/YELLOW |
| CONTACTS | BRASS/GOLD |
| COUPLING NUT MATERIAL/PLATING | BRASS/NICKEL |
| RATED CURRENT | 9 A |
| RATED VOLTAGE | 600 V |
| CONDUCTOR INSULATION MATERIAL | PVC |
| NUMBER OF CONDUCTORS (AWG) | 4X18AWG |
| OPERATING TEMPERATURE | -20°C — +80°C |
| PROTECTION CLASS | IEC IP67 |

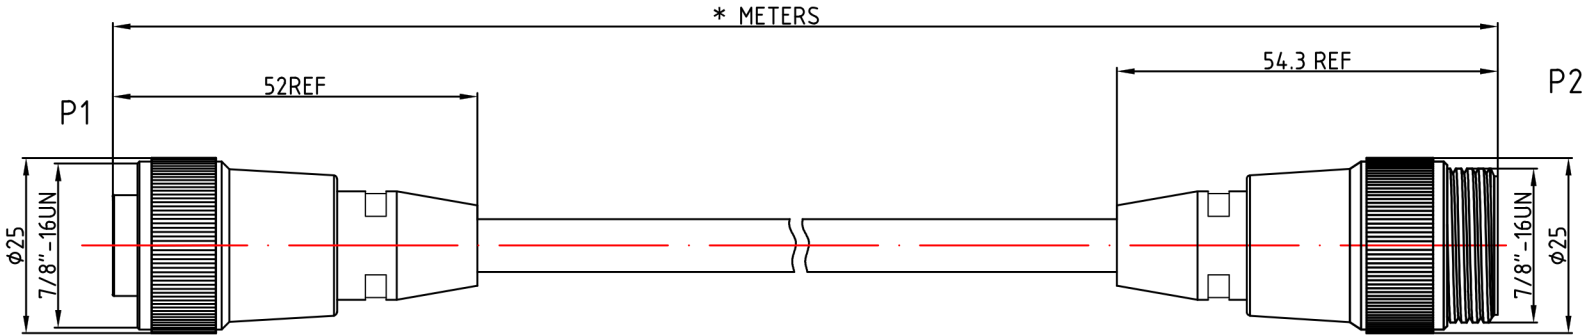

| CABLE LENGTH | TOLERANCE |
|--------------|--|
| ALL LENGTHS | +4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER |
| STRIP LENGTH | TOLERANCE |
| 0 - 7mm | ± 1.0mm |
| 8 - 29mm | ± 1.5mm |
| 30 - 49mm | ± 2.0mm |
| 50 - 69mm | ± 3.0mm |
| 70 - 100mm | ± 4.0mm |
| over 100mm | ± 5.0mm |

| REV | COUNT | DESCRIPTION OF REVISIONS | BY | CHECKED | DATE |
|-----|-------|--------------------------|----|---------|------|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

| | | | |
|-----------------------------------|-------------------------|--|----------|
| UNIT OF MEASUREMENT MILLIMETER | BROKABLE | | |
| Approved: Date: | Date: 2019.3.4 | Description: BKM7/8S4PF4PM6MPY | |
| Process:YJF Date:2019.3.8 | Scale: 1:1 | | |
| Checked:WY Date:2019.3.6 | 3RD Angle Projection | WWW.BROKABLE.COM | REV A |
| Designed: ZL Date: 2019.3.4 | | | |
| SOURCE DRAWING-FOR REFERENCE ONLY | | | |