


TYPE K THERMOCOUPLE EXTENSION CABLE

THERMOMETER EXTENSION CABLE FEP

FLUORINATED ETHYLENE PROPYLENE

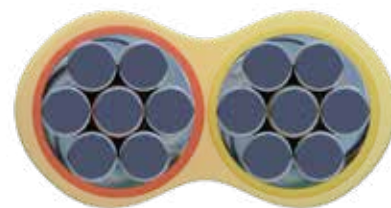

F-AWG-KX-ET

CONDUCTORS:

Flexible Thermocouple Extension Cable

INDIVIDUAL INSULATION:

Type K (Chromel-Alumel).

COLOR CODE:

FEP Fluorinated Ethylene Propylene

OUTER JACKET:

ISA-MC 96.1 1982 (Yellow + Red - Yellow Jacket)

MAXIMUM OPERATING TEMPERATURE:

FEP Fluorinated Ethylene Propylene

STANDARDS:

200°C

CERTIFICATION:

ISA-MC 96.1 1982, UL-13

ABRASION RESISTANCE:

ISO 9001:2008

MOISTURE RESISTANCE:

Very Good

Excellent

Gauge	Number of Pairs	Nominal Insulation Thickness		Nominal Outer Diameter		Minimum Bending Radius		Weight kg / km
		Pulg.	mm	Pulg.	mm	Pulg.	mm	
20	1	0.010	0.25	0.128	3.3	3/4	19	19
16	1	0.012	0.30	0.179	4.5	1	25	40

The data in the table are approximate and subject to normal manufacturing tolerances.
Special lengths available upon customer request.



VENTAS@BROKABLE.COM



BROKABLE.COM



el: +52 (866) 633 37 21